

Mounting

Location Surface
 Type 3M Specialized Double sided tape
 Ingress Protection IP40

Electrical

Input Voltage 24V DC Constant Voltage
 Dimming Fixed Output, DALI & Push Dim, 1-10V, Casambi
 Driver Location Remote
 Electrical Connection Type Starter Lead
 Starter Lead Length 3m
 Interconnection Between Fixtures Male / Female Factory Fitted Micro Connectors

Dimension

Width 16mm
 Height 13.5mm
 Weight 0.16kgs/m
 Maximum Single Luminaire Length 2.520m (Longer available upon request)
 Finished Fixture Length LED Module increments + 20mm

Light

	5W	10W	20W
LED Strip Power (Typical)	4.8W/m	7.9W/m	16.6W/m
Luminaire Lumens	299 lms/m	492 lms/m	966 lms/m
#Lumens based on 4000K			
Colour Temperature	2400K / 2700K / 3000K / 4000K		
CRI	94		
LED Module Increments	50mm		
Beam Angle	120°		
Binning (SDCM)	3		
LM-80/TM-21 Lifespan	L80 B10 > 50,000 hours		
Max. Verified Ambient Temperature	40°C		
Max. Interconnectable Run Length	5m		

SPECIFICATION CODE

PRODUCT
SLLED

WATTAGE
20

(5) 4.8W/m
(10) 7.9W/m
(20) 16.6W/m

MOUNTING
TM

(TM) 3M Double Sided Tape

FINISH
BA

(BA) Black Anodised as standard
 (BT) Black Texture
 (WP) Pearl White
 (WT) White Texture
 (SP) Other

LUMINAIRE LENGTH
2520

Run length in mm.

COLOUR TEMPERATURE
930


(924) 2400K
 (927) 2700K
 (930) 3000K
 (940) 4000K

DIMMING
DALI


(F) Fixed Output
 (DALI) DALI & Push Dim
 (1-10V) 1-10V Dimmable
 (CAS) Casambi

COLOUR METRICS


2400K

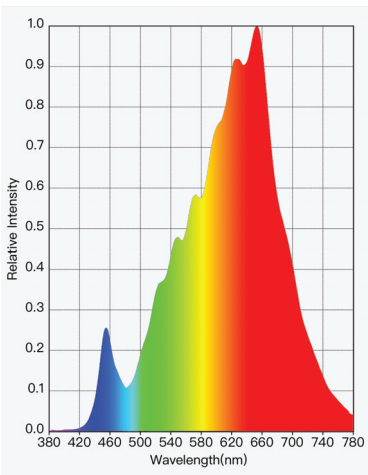






2700K

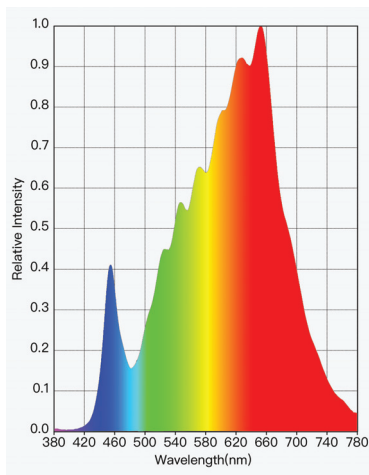


3000K

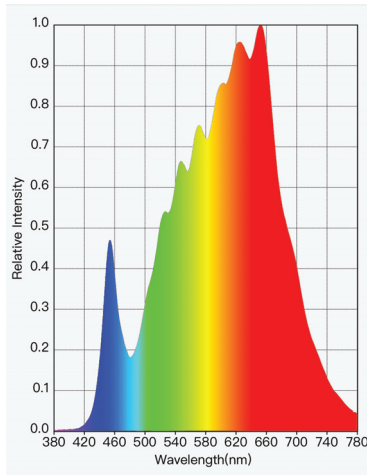

4000K

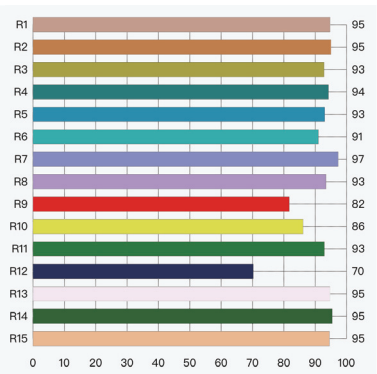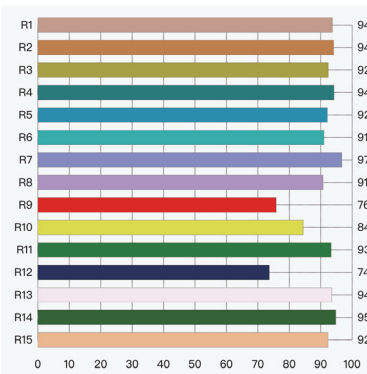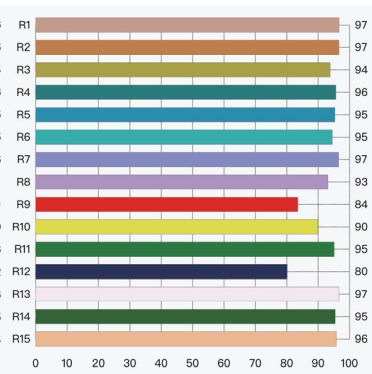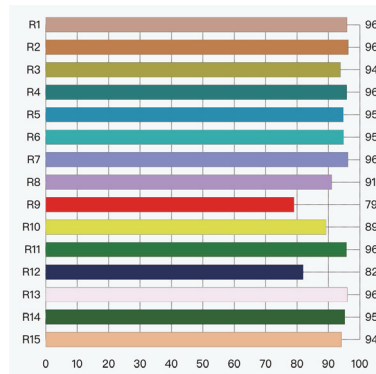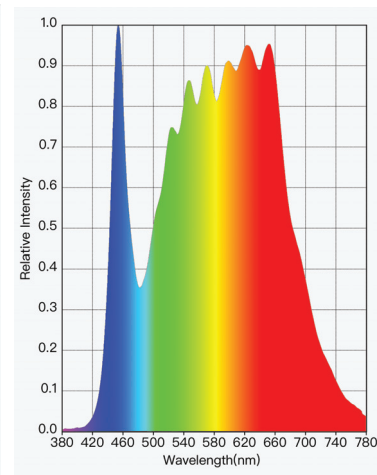

PHOTOMETRIC DATA

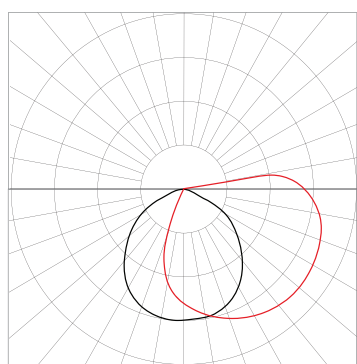

Diffuser

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015



CASAMBI